

Black Annealed Wire

Black annealed wire is mainly used for the recycling industry. A KARPAT offers several qualities and presentations to adapt to all type of bailing presses and/or materials (paper, cardboard, plastic and urban solid waste, with automatic binding...).

PRODUCTS:

G Pack

STANDARD:

- **Tensile strength:** 34 - 44 kg/mm²
- **Elongation:** 45 - 55%
- **C4D EN16120-2 /SAE 1006**

G Pack⁺




SUPERIOR:

- **Tensile strength:** 30 - 38 kg/mm²
- **Elongation:** 50 - 60%
- **C4D EN16120-2 /SAE 1006**

G Max

G-Max:

- **Tensile strength:** 45 - 55 kg/mm²
- **Elongation:** 40 - 50%
- **C18D EN16120-2 /SAE 1017**

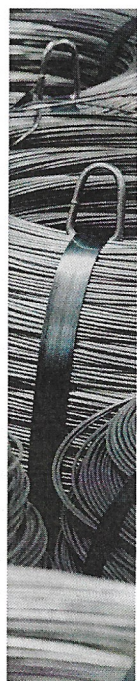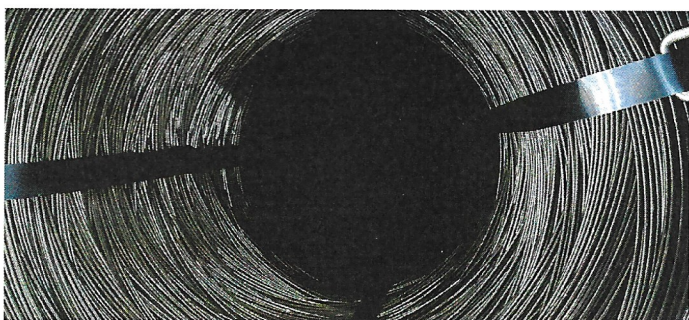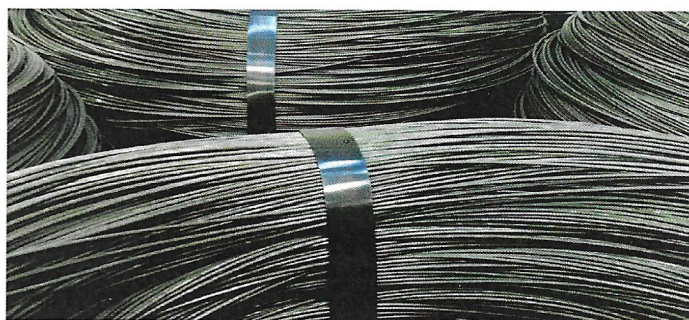

Black Annealed Wire

Technical specifications:

Diameter	From Ø 2,40 to Ø 5,50 mm
Diameter tolerance	- 0,02 / + 0,08 mm
Tensile strength homogeneity	+/- 2 kg/mm ²
Options	Oil / Film / Palet



Sistema de Gestión
ISO 9001:2015
www.tuv.com
ID 1100018225



Approx. weight:
Height:
Outer diameter:
Inner diameter:

1040 kg
800 - 900 mm
800 mm
400 mm

520 kg
350 - 500 mm
800 mm
400 mm

25 to 50 kg
150 mm
300 - 360 mm
200 mm